

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 093 990 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.04.2001 Bulletin 2001/17

(51) Int Cl.7: **B62D 1/184, B62D 1/19**

(21) Application number: 00203237.3

(22) Date of filing: 19.09.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

• **Gayrard, Philippe**
75009 Paris (FR)
• **Ledreau, Agathe**
75010 Paris (FR)

(30) Priority: 20.09.1999 US 154772 P

(71) Applicant: **Delphi Technologies, Inc.**
Troy, MI 48007 (US)

(74) Representative: **Neumann, Stephan et al**
Delphi Automotive Systems
Centre Technique Paris,
117 Avenue des Nations,
BP 60059
95972 Roissy Charles de Gaulle Cedex (FR)

(72) Inventors:
• **Manwaring, Marvin**
Saginaw, MI 48603 (US)

(54) Vehicle steering column

(57) The vehicle steering column (10) has a rake adjustment and a telescope adjustment. The adjustment mechanism includes a compression bracket (28) with a telescope slot (34), a rake bracket (38) with a rake slot (42) and a rake bolt (54) that passes through the telescope slot (34) and the rake slot (42). A wedge lock (68) is mounted on the rake bolt (54) and positioned in the rake slot (42) and the telescope slot (34). Rake and tel-

escape teeth (74) and (72) on the wedge lock (68) are held out of engagement with a rake tooth rack (58) and a telescope tooth rack (64) during rake and telescope adjustment. The rake bolt (54) is tightened to hold a selected adjustment position and the telescope teeth (72) on the wedge lock (68) engage the telescope tooth rack (64). During a collision the rake teeth (74) on the wedge lock (68) are moved into engagement with the rake tooth rack (58) to fix the rake and telescope adjustments.

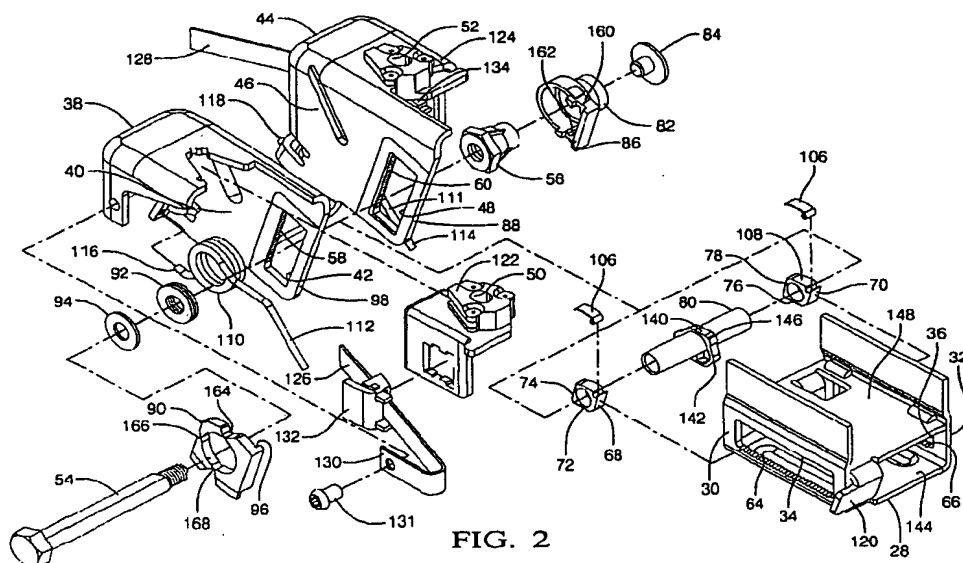


FIG. 2

EP 1 093 990 A2

HE18063

Description

FIELD OF THE INVENTION

[0001] This invention relates generally to lock systems for steering columns and more particularly to those which selectively lock the column against tilt or rake and telescoping movements in the event of a collision.

BACKGROUND OF THE INVENTION

[0002] Land vehicles manufactured today are frequently equipped with convenience features as well as safety features. The convenience features include steering columns with tilt adjustments, rake adjustments and telescope adjustments. These adjustments can be stepped adjustments or infinitely variable adjustments. The safety features include air bags and energy absorption devices. An air bag for a vehicle driver is generally mounted in the steering wheel. Energy absorption devices for drivers include mechanisms that permit a controlled collapse of the steering column.

[0003] Steering wheel mounted air bags are designed to deploy in the event of a collision to provide protection to the driver. It is desirable that the column remain fixed in the position of adjustment selected by the driver throughout the event of the collision to afford maximum performance and protection offered by the air bag. In addition to the airbag, adjustable position columns are typically fitted with energy absorption ("EA") systems, which may take the form of deformable energy absorbing straps or the like, that allow the column to collapse during a collision at a controlled rate when impacted by the driver to offer added protection to the driver. It is best that the column remain locked in the adjusted position and not slip to afford maximum performance of the EA system.

[0004] Steering columns with infinitely variable rake and telescope adjustments rely upon friction to maintain selected positions of adjustment. During normal operation and in a typical collision, the friction is generally sufficient to hold the adjustment systems against slippage. However, the frictional locking system does not provide a positive mechanical lock that would preclude movement of the adjustment parts under extreme conditions where the impact force on the column may be very high.

SUMMARY OF THE INVENTION

[0005] A locking system for an adjustable steering column according to the invention comprises at least one toothed rack and at least one associated toothed locking device movable selectively into engagement with the toothed rack. The locking device is normally supported out of engagement with the toothed rack to permit usual adjustment of the column, but is movable into meshing tooth-to-tooth locking engagement with the teeth of the rack in response to an applied impact force on the col-

umn by the driver during a collision event to positively lock the column against inadvertent adjustment during controlled collapse of the column.

[0006] According to a further aspect of the invention, the locking system is for a column having rake and telescoping adjustment features and includes a rack associated with the relatively movable telescoping adjustment components of the column and a rack associated with the relatively movable rake adjustment components of the column. Also included is a toothed locking device associated with the racks which is selectively movable into positive locking engagement in response to the applied impact load on the column to preclude both rake and telescoping movements of the column during the controlled collapse of the column in a collision event.

[0007] According to still a further aspect of the invention, the racks associated with the relatively movable rake and telescoping components are arranged adjacent one another and the locking device comprises a common locking element having teeth engagable with the teeth of both the rake and telescoping racks so as to simultaneously prevent both rake and telescoping movements when engaged.

[0008] According to still a further aspect of the invention, the set of rack teeth of the rake and telescoping racks are disposed at an acute angle and the teeth of the common locking element are likewise set at an acute angle such that the locking element is forced into wedged locking engagement with the racks to enhance the locking power of the locking system.

[0009] According to a preferred embodiment of the invention, the steering column includes a jacket assembly having a lower jacket and an upper jacket that telescopically receives the lower jacket. A telescopic steering shaft is journaled in the jacket assembly. A rake support on the lower end of the lower jacket pivotally supports the vehicle steering column for pivotal movement about a transverse horizontal rake axis. A compression bracket fixed to the upper jacket has at least one telescope slot. At least one rake bracket, for supporting the compression bracket has a rake slot. A rake bolt passes through the rake slot and the at least one telescope slot and is tightened to frictionally hold a rake position and a telescope position. A rake tooth rack in the rake slot faces away from the rake axis and extends upward and rearwardly away from the rake axis. A telescope tooth rack in the at least one telescope slot is substantially parallel to the steering shaft and faces upwardly. A wedge lock on the rake bolt has a plurality of telescope teeth engagable with the telescope tooth rack and has a plurality of rake teeth engagable with the rake tooth rack. A connection between the rake bolt and the wedge lock permits the wedge lock telescope teeth to move into engagement with the telescope tooth rack in response to rotation of the rake bolt in a direction that tightens the rake bolt.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] These and other features and advantages of the present invention will become more readily appreciated when considered in connection with the following detailed description and appended drawings, wherein:

Figure 1 is a perspective view of a steering column with rake and telescope adjustment and a wedge tooth lock;

Figure 2 is an expanded view of the rake and telescope adjustment assemblies and the wedge tooth lock;

Figure 3 is a perspective view of the rake brackets with the left side rake bracket expanded and the right side rake bracket assembled;

Figure 4 is an enlarged sectional view of a rake bolt and a wedge lock in an unclamped position with parts broken away;

Figure 5 is an enlarged sectional view of the rake bolt and a wedge lock in a clamped position with parts broken away; and

Figure 6 is an enlarged sectional view of the rake bolt and a wedge lock in a locked position after the rake bolt retainer has fractured.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0011] The steering column 10, for an automotive vehicle, has a jacket assembly 12 with a lower jacket 14 and an upper jacket 16. The forward end of the lower jacket 14 has a rake support 17 with trunnions 18 and 20 that receive a pin which pivotally attaches the steering column 10 to a vehicle frame for pivotal movement about a transverse horizontal rake axis 62. The lower jacket 14 is telescopically received in the upper jacket 16. A steering shaft 22 is journaled in the jacket assembly 12. To accommodate telescopic movement of the upper jacket 16 relative to the lower jacket 14, the steering shaft 22 is also telescopic. A steering wheel (not shown) has splines which engage the splines 24 on the shaft 22. A nut engages the threads 26 to secure a steering wheel to the shaft 22.

[0012] A compression bracket 28 is welded to the upper jacket 16. Vertical side walls 30 and 32 have telescope slots 34 and 36. A left side rake bracket 38 has a vertical side wall 40 with a rake slot 42. A right side rake bracket 44 has a vertical side wall 46 with a rake slot 48. A left side rake bracket 38 is clamped to the vehicle body frame by a bolt (not shown) that passes through the anchor bolt passage 50. The right side rake bracket 44 is clamped to the vehicle body frame by a bolt (not shown) that passes through an anchor bolt passage 52, in a position spaced from the left side rake bracket 38. The compression bracket 28 is positioned between the side wall 40 of the left side rake bracket 38 and the side wall 46 of the right side rake bracket 44. A

rake bolt 54 passes through the rake slot 42, the telescope slot 34, the telescope slot 36 and the rake slot 48. A triple lead rake nut 56 screws onto one end of the rake bolt 54. When the rake bolt 54 and the nut 56 are tightened, the compression bracket 28 is held in a fixed position by friction. By loosening the rake bolt 54 and nut 56, the friction forces on the compression bracket 28 are reduced and the rake and telescope positions can be changed to any position within the rake range and within the telescope range. When the steering wheel is in the desired position the rake bolt 54 and nut 56 are tightened to clamp the steering column 10 in the selected position.

[0013] Steering columns 10 are generally equipped with air bags and energy absorption devices to protect drivers in collisions. For these protective devices to work properly the rake positions and the telescope positions should remain substantially fixed during a collision. The friction forces that result from tightening the rake bolt 54 and nut 56 may be insufficient to hold the steering column 10 in the selected rake position and telescope position. A lock system that locks the telescope adjustment as well as the rake adjustment is described below.

[0014] The rake slots 42 and 48 have rake tooth racks 58 and 60 on their front edges. These rake tooth racks 58 and 60 extend upward and radially outward relative to the rake axis 62. The telescope slots 34 and 36 have telescope tooth racks 64 and 66 on their lower edge. A left wedge lock 68 is mounted on the rake bolt 54 and positioned in the rake slot 42 and the telescope slot 34. A right wedge lock 70 is mounted on the rake bolt 54 and positioned in the telescope slot 36 and the rake slot 48. The left wedge lock 68 has downwardly facing telescope teeth 72 and forwardly facing rake teeth 74. The right wedge lock 70 has downwardly facing telescope teeth 76 and forwardly facing rake teeth 78. A sleeve 80 on the rake bolt 54 maintains the required separation between the wedge locks 68 and 70.

[0015] A first rake bolt retainer 82 is secured to the nut 56 by a fastener 84. The retainer 82 has a lip 86 which slides on a surface 88 on the side wall 46, keeps the nut 56 from rotating, and holds the rake teeth 78 from engaging rake tooth rack 60 in the rake slot 48. A second rake bolt retainer 90 slides over a thrust bearing 92 and a washer 94 on the rake bolt 54. A lip 96 on the second rake bolt retainer 90 slides on a surface 98 on the side wall 40 and holds the rake teeth 74 on the left wedge lock 68 from engaging the rake tooth rack 58 in the rake slot 42.

[0016] The rake bolt 54 has a flat surface 100 as shown in Figures 4-6. The wedge locks 68 and 70 also have a bore flat surface 102. When the rake bolt 54 is unlocked, the wedge locks 68 and 70 are raised relative to the rake bolt axis of rotation 104 and the telescope teeth 72 and 76 on the wedge locks 68 and 70 are out of engagement with a telescope tooth racks 64 and 66. When the rake bolt is rotated to a locked position as shown in Figure 5, the flat surface on the rake bolt 54 is

moved into radial alignment with the bore flat surface 102 in the wedge locks 68 and 70. This frees the wedge locks 68 and 70 to move downward. Spring fingers 106 and 108 mounted on the wedge locks 68 and 70 ensure that the telescope teeth 72 and 76 move into engagement with the telescope tooth racks 64 and 66. In this position, a forward force on the steering column 10 which is sufficient to overcome the friction forces between the rake brackets 38 and 44 and the compression bracket 28 and fracture the rake bolt retainers 82 and 90 and move the rake teeth 74 and 78 on the wedge locks 68 and 70 into engagement with the rake tooth racks 58 and 60 in the rake slots 42 and 48. In this position, the wedge locks 68 and 70 prevent movement between the rake brackets 38 and 44 and the compression bracket 28. Total movement between the rake brackets 38 and 44 and the compression bracket 28 during a collision is substantially less than one quarter of an inch.

[0017] The coil springs 110 and 111 have arms 112 and 114 that contact the rake bolt retainers 82 and 90 and urge them upward. Coil springs 110 and 111 also have short arms 116 and 118 that are anchored to the rake brackets 38 and 44. The purpose of the coil springs 116 and 118 is support the steering column jacket assembly 12 when the rake bolt 54 is loosened and keep the steering wheel from falling on a person. Since the coil springs 110 and 111 act on the rake bolt retainers 82 and 90 as well as the rake bolt 54, they move the telescope teeth 72 and 76 out of engagement with the tooth racks 64 and 66 when the rake bolt is loosened for steering column adjustment.

[0018] The compression bracket 28 includes a stop arm 120 which contacts the rake bolt retainer 90 to limit rearward telescopic adjustment of the upper jacket 16 of the jacket assembly 12.

[0019] The left side rake bracket 38 and the right side rake bracket 44 include breakaway capsules 122 and 124. These breakaway capsules 122 and 124 remain attached to the vehicle body frame and the remainder of the rake brackets 38 and 44 separate from the capsules upon the application of a predetermined force to the jacket assembly 12. The predetermined force may occur during a collision. After separation of the rake brackets 38 and 44 from the breakaway capsules 122 and 124, energy absorption straps 126 and 128 control forward movement of the upper jacket 16. An anchor end 130 of each strap 126 and 128 is clamped to the adjacent rake bracket 38 or 44 by a fastener 131. The free end of each of the energy absorption strips 126 and 128 passes through an energy absorption strap retainer 132 or 134. The strap retainers 132 and 134 are secured to the breakaway capsules 122 and 124 respectively. As the straps 126 and 128 pass through the strap retainers 132 or 134 they are bent into an arc and then restraightened to absorb energy.

[0020] The lips 86 and 96 on the first and second rake bolt retainers 82 and 90 hold the rake teeth 74 and the

rake teeth 78 out of engagement with the rake tooth racks 58 and 60 during normal operation and use of the steering column 10. There is no physical guide that holds the rake bolt 54 adjacent to the upper side of the telescope slots 34 and 36. The coil springs 110 and 111, as explained above, exert a force on the rake bolt 54, through the first and second rake bolt retainers 82 and 90 that generally position the rake bolt adjacent to the upper side of the telescope slots 34 and 36.

[0021] A cam 140 is provided to ensure that the rake bolt 54 is positioned relative to the telescope tooth racks 64 and 66. The cam 140 is integral with the sleeve 80 which rotates with the rake bolt 54. The rake bolt 54 as shown in Figures 4, 5 and 6 has a noncircular cross section. The sleeve 80 has an internal passage with a shape that is substantially the same as the shape of the rake bolt 54 and prevents rotation of the sleeve 80 relative to the rake bolt. Rotation of the rake bolt 54 clockwise, as shown in Figure 4 to loosen the rake bolt, rotates the lobe 142 into contact with the bottom wall 144 of the compression bracket 28 and forces the rake bolt 54, left wedge lock 68 and the right wedge lock 70 away from the telescope tooth racks 64 and 66. In this position the wedge locks 68 and 70 do not interfere with telescopic adjustment of the steering column 10. Rotation of the rake bolt 54 counterclockwise, as shown in Figure 5 to tighten the rake bolt, moves the lobe 146 of the cam 140 into contact with the upper transverse wall 148 of the compression bracket 28 and moves the rake bolt toward the telescope tooth racks 64 and 66. In this position the telescope teeth 72 and 76 on the wedge locks 68 and 70 can move into engagement with the telescope tooth racks 64 and 66 as intended.

[0022] During operation of the steering column 10, the rake bolt 54 is loosened and cammed away from the telescope tooth racks 64 and 66 by the cam 140. The telescope position and rake position are then adjusted. Following adjustment of the steering wheel and the steering shaft 22, the rake bolt 54 is tightened. Tightening the rake bolt 54 causes the lobe 146 of the cam 140 to move the rake bolt toward the telescope tooth racks 64 and 66, frees the wedge locks 68 and 70 to move relative to the rake bolt, and compresses the compression bracket 28 between the left and right side rake brackets 38 and 44. The spring fingers 106 and 108 on the wedge locks 68 and 70 move the telescope teeth 72 and 76 into engagement with the telescope tooth racks 64 and 66. Frictional forces between the left side rake bracket 38, the compression bracket 28 and the right side rake bracket 44 maintain the chosen rake and telescope adjustments.

[0023] A collision between a vehicle with the steering column 10 and a large or fast moving object will slow the vehicle and the driver will move forward toward the steering wheel. Force exerted on the steering wheel by the driver will tend to move the steering wheel forward. This force may also tend to move the steering wheel upward. The force on the steering wheel, if sufficiently

strong, will first overcome the frictional forces on the compression bracket 28 and slide the compression bracket forward relative to the left and right side rake brackets 38 and 44. The engagement of the telescope tooth racks 64 and 66 with the telescope teeth 72 and 74 moves the left and right wedge locks 68 and 70 forward with the compression bracket 28. This forward movement of the wedge locks 68 and 70 and the rake bolt 54 fractures the first and second rake bolt retainers 82 and 90 and moves the rake teeth 74 and 78 into engagement with the rake tooth racks 58 and 60. The first rake bolt retainer 82 fractures in at least one of the weakened areas 160 and 162 shown in Figure 2. The second rake bolt retainer 90 fractures in at least one of the weakened areas 164, 166 or 168. Up to this point total movement of the steering shaft 22 is less than 1/4 of an inch.

[0024] An increased forward force on the steering shaft 22 will separate the left and right side rake bracket 38 and 44 from the breakaway capsules 122 and 124. Upon separation between the rake brackets 38 and 44 and the breakaway capsules 122 and 124, the energy absorption straps 126 and 128 will resist forward movement of the steering shaft 22 and absorb energy.

[0025] Obviously, many modifications and variation of the present invention are possible in light of the above teachings. It is, therefore, to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described. The invention is defined by the claims.

Claims

1. A locking system for an adjustable steering column having adjustment components which are relatively movable to permit adjustment in the position of the column, said locking system comprising:

at least one rack (28, 38, 44) having a set of rack teeth (64, 58, 60) associated with the adjustment components of the column; and
at least one associated locking device (54, 68, 70) having teeth (72, 76; 74, 78) supported during normal operation of the column out of locking engagement with said teeth (64, 58, 60) of said rack (28, 38, 44) to permit normal adjustments of the column, and supported for movement into said locking engagement with said rack (28, 38, 44) in response to application of an impact force on the column in a collision event in a direction of collapse of the column to positively lock the adjustment components of the column against relative adjustment movement during application of the impact force to enable controlled collapse of the column without relative movement of the adjustment components.

2. The system of claim 1 including at least a pair of said racks (28, 38, 44).
3. The system of claim 2 wherein one of the racks (28) is associated with relatively movable telescoping components of the column and the other of said racks (38, 44) is associated with relatively movable rake components of the column.
4. The system of claim 4 wherein said locking device (54, 68, 70) includes teeth (72, 76; 74, 78) engagable with said teeth (64, 58, 60) of said racks (28, 38, 44) in response to application of the impact force to positively lock the column against telescoping and rake movements during the collision event.
5. The system of claim 4 wherein said teeth (64, 58, 60) of the racks (28, 38, 44) are arranged adjacent one another and said locking device includes at least one locking element (68, 70) having teeth (72, 76; 74, 80) engagable with said teeth (64, 58, 60) of both of said racks (28, 38, 44).
6. The system of claim 5 wherein said teeth (64, 58, 60) of said racks (28, 38, 44) and said corresponding teeth (72, 76; 74, 80) of said locking element (68, 70) are disposed at an acute angle such that said locking element (68, 70) is forced into wedging locked engagement with said racks (28, 38, 44) by application of the impact force to the column.
7. The system of claim 1 including a retainer (82, 90) releasably supporting said locking device (54, 68, 70) out of said engagement with said rack (28, 38, 44) during normal operation of the column.
8. The system of claim 7 wherein retainer (82, 90) is operative to release said locking device (54, 68, 70) in response to application of said impact force to permit said locking device (54, 68, 70) to move into said locking engagement.
9. The system of claim 8 including a spring (106) acting on said locking device in opposition to said retainer (82, 90) to constantly urge said locking device (54, 68, 70) toward said locking engagement with said rack (28, 38, 44), and operative in response to said release of said locking device (54, 68, 70) by said retainer (82, 90) to positively move said locking device (54, 68, 70) into said locking engagement under the force of said spring (106).
10. A vehicle steering column (10) comprising:
 - a jacket assembly (12) including a lower jacket (14) and an upper jacket (16) that telescopically receives the lower jacket (14);
 - a telescopic steering shaft (22) journaled in the

jacket assembly (12);

a rake support (17) on the lower end of the lower jacket (14) that pivotally supports the vehicle steering column (10) for pivotal movement about a transverse horizontal rake axis (62);

a compression bracket (28) fixed to the upper jacket (16) and having at least one telescope slot (34);

at least one rake bracket (38), for supporting the compression bracket (28) and the upper jacket (16) having a rake slot (42);

a rake bolt (54) passing through the rake slot (42) and the at least one telescope slot (34) that is tightened to frictionally hold a rake position and a telescope position;

a rake tooth rack (58) in the rake slot (42) that faces away from the rake axis (62) and extends upward and rearwardly away from the rake axis (62);

a telescope tooth rack (64) in the at least one telescope slot (34) that is substantially parallel to the steering shaft (22) and faces upwardly;

a wedge lock (68) on the rake bolt (54) having a plurality of telescope teeth (72) engagable with the telescope tooth rack (64) and having a plurality of rake teeth (74) engagable with the rake tooth rack (58); and

a connection between the rake bolt (54) and the wedge lock (68) that permits the telescope teeth (72) to move into engagement with the telescope tooth rack (64) in response to rotation of the rake bolt (54) to tighten the rake bolt (54).

11. A vehicle steering column (10) as set forth in claim 10 including a cam surface (105) on the rake bolt (54) that cams the telescope teeth (72) out of engagement with the telescope tooth rack (64) in response to rotation of the rake bolt (54) to loosen the rake bolt (54).

12. A vehicle steering column (10) as set forth in claim 11 including a cam surface (105) on the rake bolt (54) that cams the telescope teeth (72) toward engagement with the telescope tooth rack (64) in response to loosening the rake bolt (54).

13. A vehicle steering column (10) as set forth in claim 10 wherein the connection between the rake bolt (54) and the wedge lock (68) is a lost motion connection.

14. A vehicle steering column (10) as set forth in claim 13 including a spring (106) that biases the plurality of telescope teeth (72) on the wedge lock (68) toward the telescope tooth rack (64).

15. A vehicle steering column (10) as set forth in claim 14 wherein the spring (106) is attached to the

wedge lock (68) and acts on the compression bracket (28).

16. A vehicle steering column (10) as set forth in claim 10 wherein the at least one rake bracket (38) includes a left rake bracket (38) and a right rake bracket (44) having a left rake slot (42) and a right rake slot (48) and a second wedge lock (70) on the rake bolt (54).

17. A vehicle steering column (10) comprising:

a jacket assembly (12) including a lower jacket (14) and an upper jacket (16) that telescopically receives the lower jacket (14);

a telescopic steering shaft (22) journaled in the jacket assembly (12);

a rake support (17) on the lower end of the lower jacket (14) that pivotally supports the vehicle steering column (10) for pivotal movement about a transverse horizontal rake axis (62);

a compression bracket (28) fixed to the upper jacket (16) and having a left telescope slot (34) and a right telescope slot (36);

a left rake bracket (38) having a left rake slot (42) adjacent to the left telescope slot (34) of the compression bracket (28) and a right rake bracket (44) having a right rake slot (42) adjacent to the right telescope slot (36) of the compression bracket (28);

a rake bolt (54) passing through the left rake slot (42), the left telescope slot (34), the right telescope slot (36), and the right rake slot (48); a left rake tooth rack (58) in the left rake slot (42) that faces away from the rake axis (62) and extends upward and rearwardly away from the rake axis (62);

a right rake tooth rack (60) in the right rake slot (48) that faces away from the rake axis (62) and extends upward and radially away from the rake axis (62);

a left telescope tooth rack (64) in the left telescope slot (34) that faces upwardly and a right telescope tooth rack (76) in the right telescope slot (36) that faces upwardly;

a left wedge lock (68) on the rake bolt (54) having a plurality of left telescope teeth (72) engagable with the left telescope tooth rack (64) and a plurality of left rake teeth (74) engagable with the left rake tooth rack (58);

a right wedge lock (70) on the rake bolt (54) having a plurality of right telescope teeth (76) engagable with the right telescope tooth rack (66) and a plurality of right rake teeth (78) engagable with the right rake tooth rack (60);

a first fracturable rake bolt retainer (82) mounted on the rake bolt (54) and holding the right rake teeth (78) from engagement with the right

- 5 rake tooth rack (60) during adjustment and a second fracturable rake bolt retainer (90) mounted on the rake bolt (54) and holding the left rake teeth (74) from engagement with the left rake tooth rack (58) during adjustment; and at least one cam (140) secured to the rake bolt (54) which holds the left telescope teeth (72) out of engagement with the left telescope rack (64) and holds the right telescope teeth (76) out of engagement with the right telescope rack (66) when the rake bolt (54) is loosened.
- 10 18. A vehicle steering column (10) as set forth in claim 17 including a lost motion connection between the rake bolt (54) and the left wedge lock (68) and right wedge lock (70) that permit the left telescope teeth (72) to engage the left telescope tooth rack (64) and permit the right telescope teeth (76) to engage the right telescope tooth rack (66) when the rack bolt (54) is in a clamped position.
- 15 19. A vehicle steering column (10) as set forth in claim 18 including a left spring (106) that urges the left wedge lock (68) toward the left telescope tooth rack (64) and a right spring (108) that urges the right wedge lock (70) toward the right telescope tooth rack (66).
- 20 20. A method of selectively locking an adjustable position steering column against adjustment, said method comprising:
- 25 fitting the column with a toothed rack (28, 38, 44) associated with the adjustable components of the column;
- 30 fitting the column with a toothed locking mechanism (54, 58, 60) adjacent the rack (28, 38, 44); and
- 35 supporting the locking mechanism (54, 68, 70) such that during normal operation of the column the teeth (72, 76; 74, 80) of the locking mechanism are out of engagement with the teeth (64, 58, 60) of the rack (28, 38, 44) to permit adjustment in the position of the steering column, while causing the locking mechanism (54, 68, 70) to move into locking engagement with the rack (28, 38, 44) in response to application of an impact force on the column in the direction of collapse during a collision event to positively lock the adjustable components of the column against relative movement to enable controlled collapse of the column without relative movement of the adjustment components.
- 40 45 50 55 21. The method of claim 20 including locking the column against rake and telescoping movements by engagement of the locking mechanism (54, 68, 70) with the rack (28, 38, 44) during the collision event.

22. The method of claim 20 including supporting the locking mechanism (54, 68, 70) out of locking engagement with a retainer (82, 96) which is operative to release the locking mechanism (54, 68, 70) upon application of the impact force.

23. A method of operating a vehicle steering column (10) having a rake adjustment and a telescope adjustment with a rake bracket (44), a rake slot (48) in the rake bracket (44), a rake tooth rack (60) on a rake slot side wall, a compression bracket (28), a telescope slot (36) in the compression bracket (28), a telescope tooth rack (66) on a telescope slot side wall, a wedge lock (70) with a plurality of telescope teeth (76) and a plurality of rake teeth (78), and a rake bolt (54) passing through the rake slot (48) and the telescope slot (36) and holding the wedge lock (70) in the rake slot (48) and in the telescope slot (36) comprising:

loosening the rake bolt (54) and holding the plurality of telescope teeth (76) out of engagement with the telescope tooth rack (66) and holding the plurality of rake teeth (78) out of engagement with the rake tooth rack (60);
selecting a telescope position and a rake position of the vehicle steering column (10);
tightening the rake bolt (54) to frictionally hold the selected telescope position and rake position;
moving the plurality of telescope teeth (76) into engagement with the telescope tooth rack 66 when the rake bolt (54) is tightened while holding the plurality of rake teeth (78) out of engagement with the rake tooth rack (60);
sliding the compression bracket (28) relative to the rake bracket (44) while the rake bolt (54) is tightened; and
moving the plurality of rake teeth (78) into engagement with the rake tooth rack (60) while sliding the compression bracket (28) relative to the rake bracket (44).

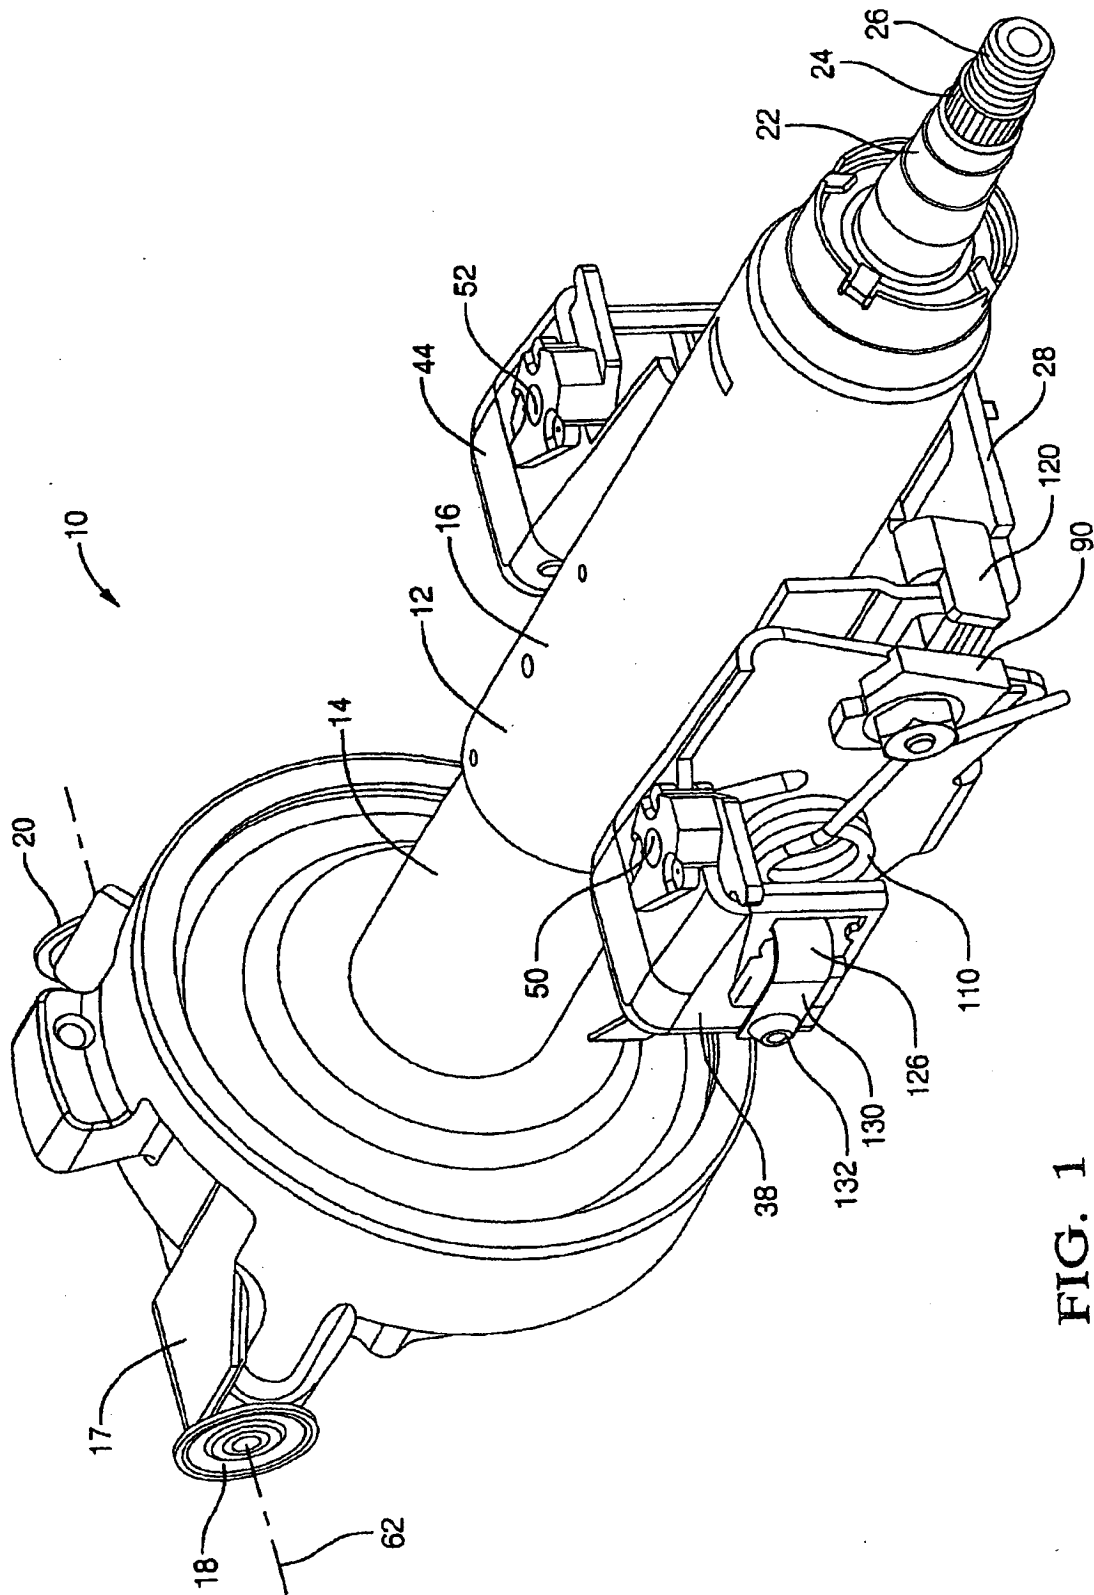


FIG. 1

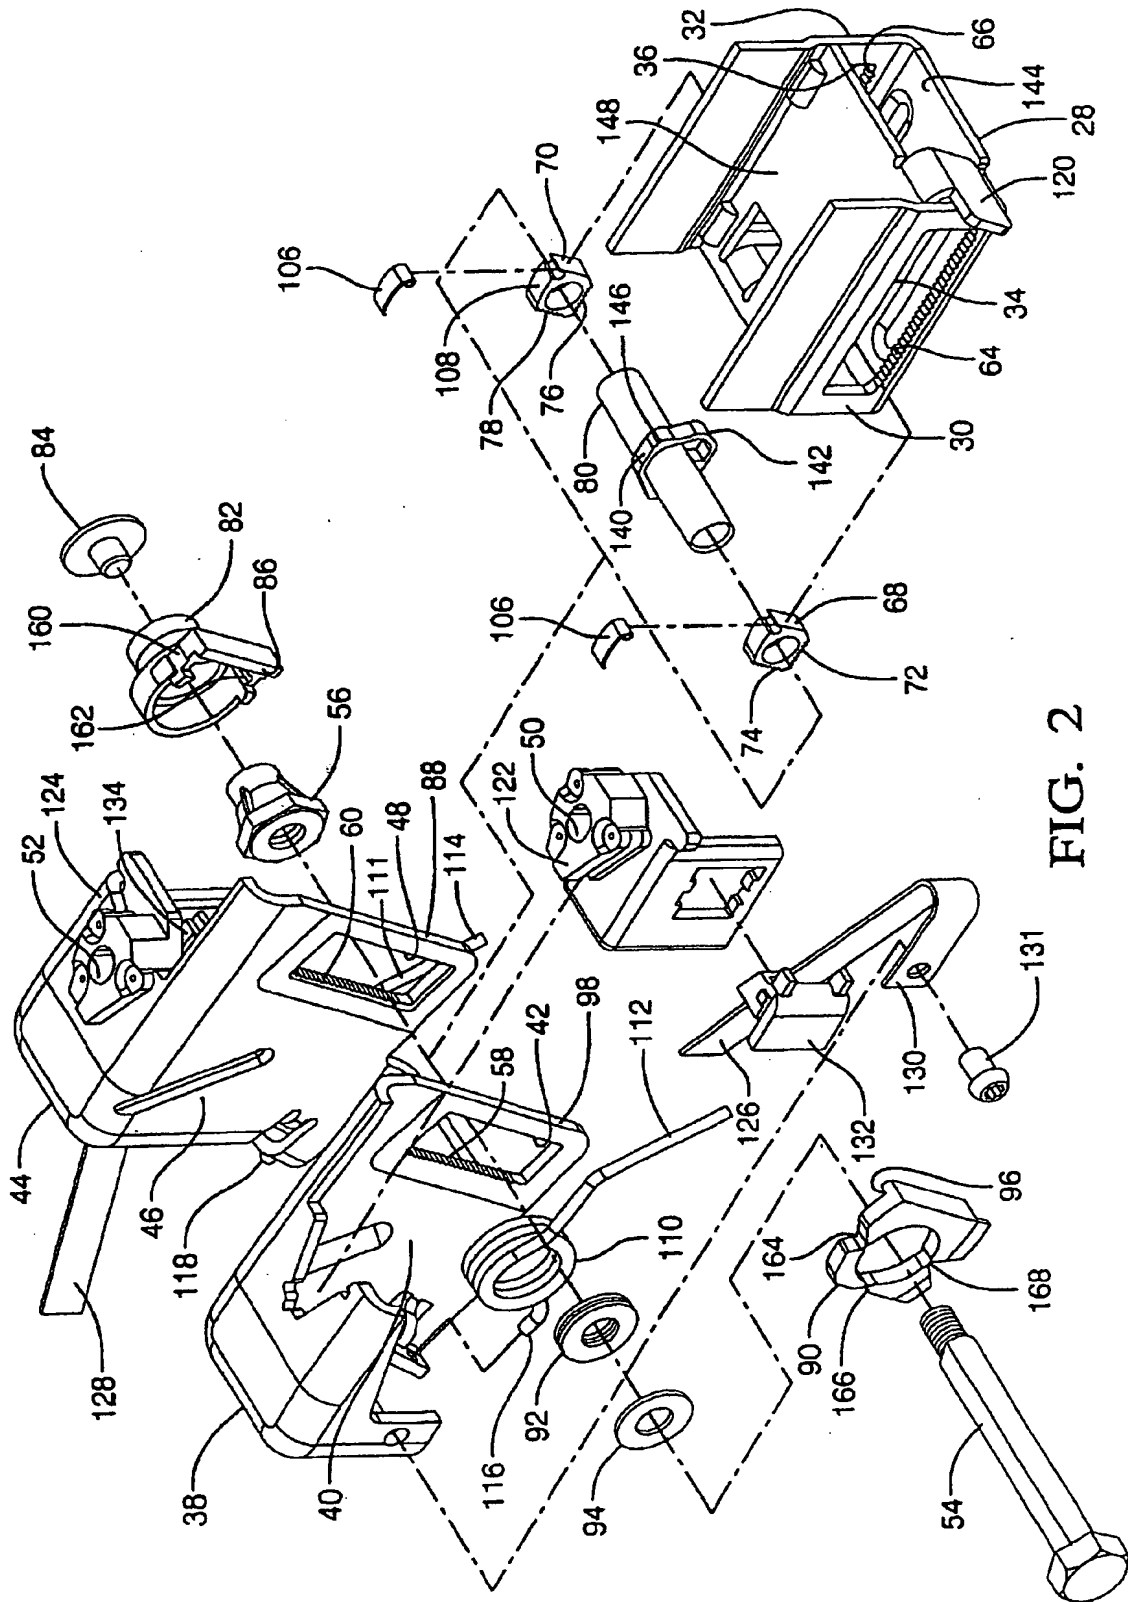


FIG. 2





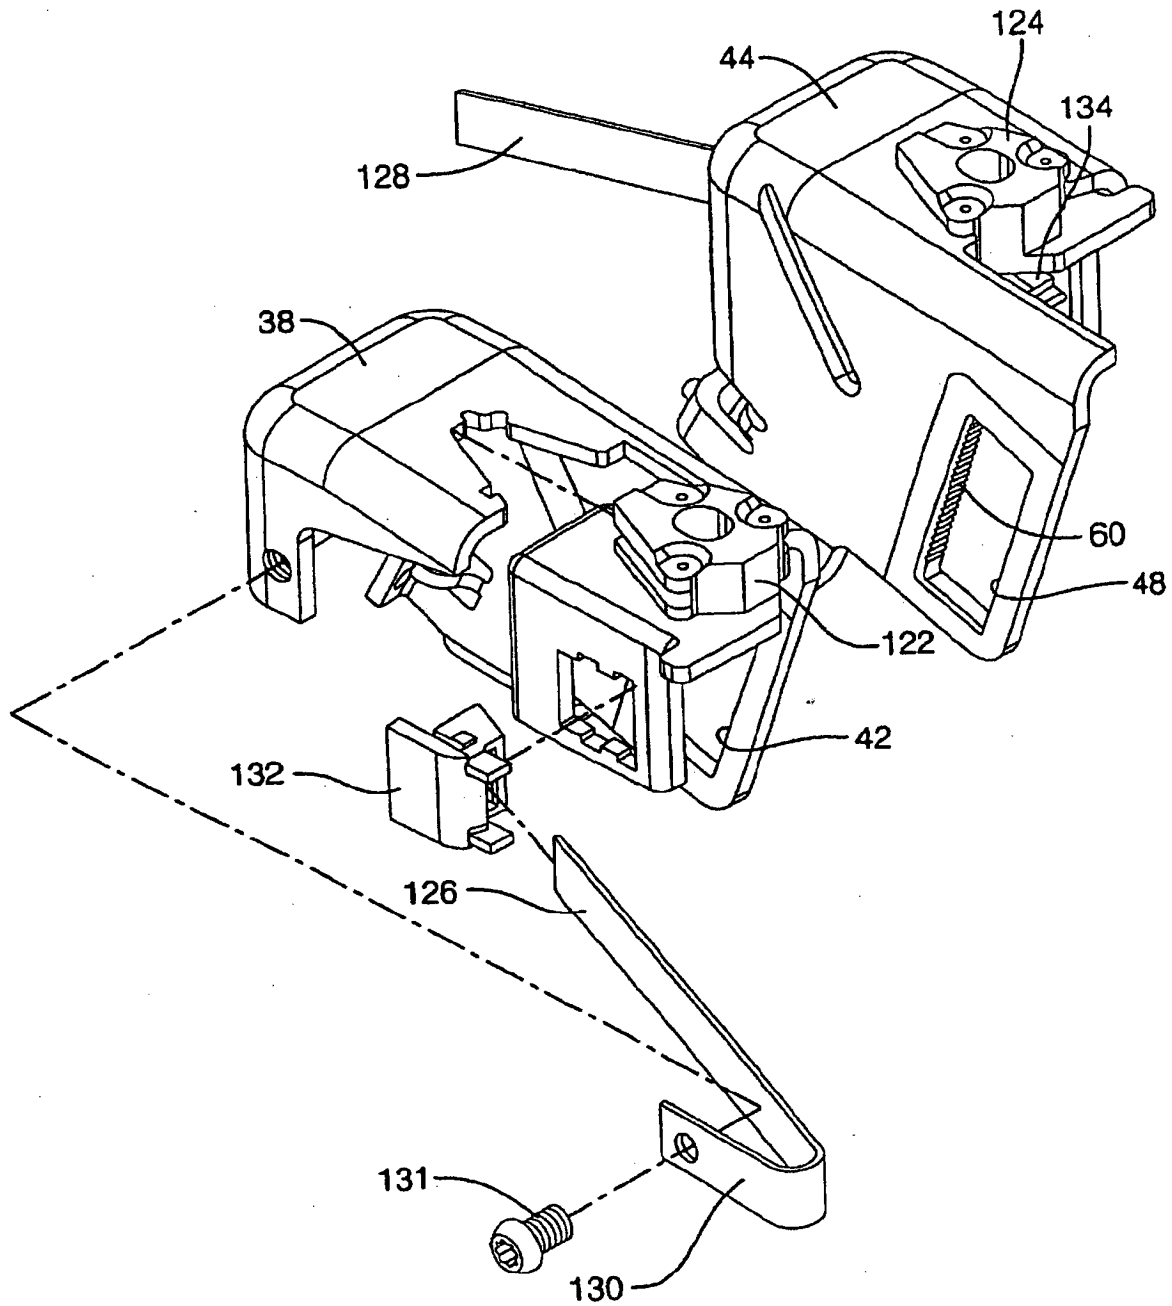


FIG. 3

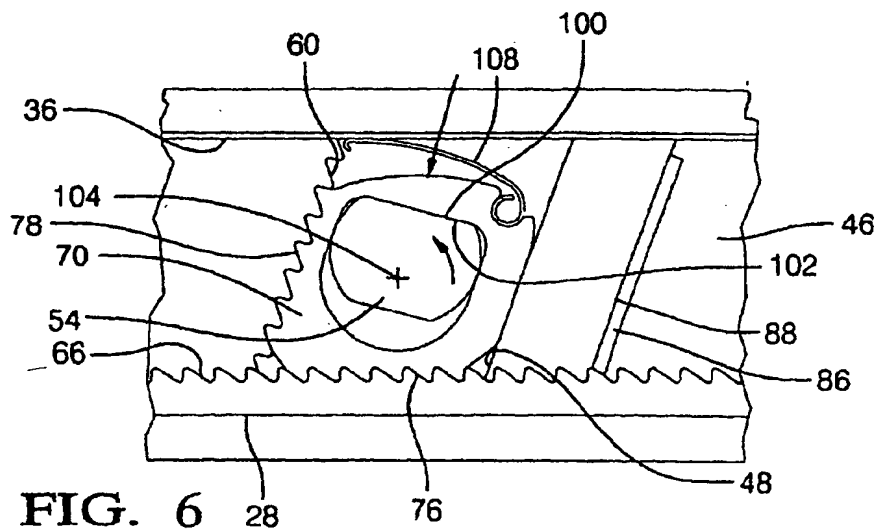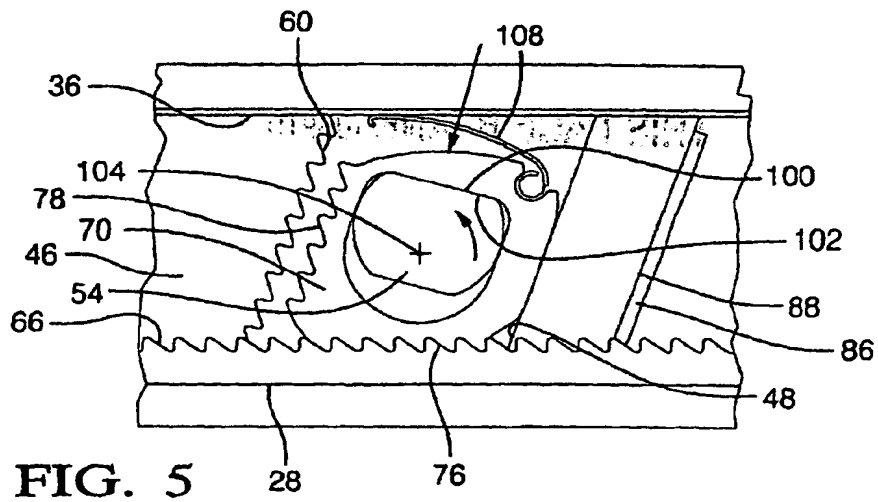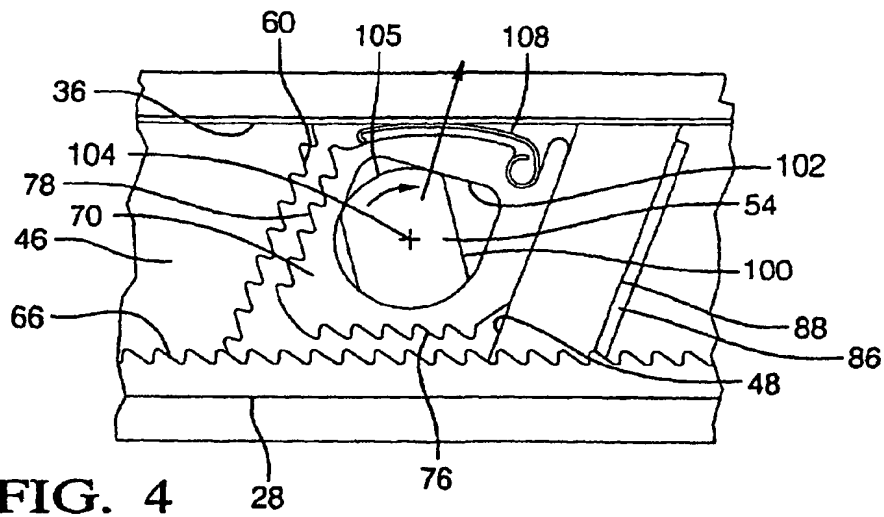

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 093 990 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.06.2004 Bulletin 2004/23

(51) Int Cl.7: **B62D 1/187, B62D 1/19**

(43) Date of publication A2:
25.04.2001 Bulletin 2001/17

(21) Application number: **00203237.3**

(22) Date of filing: **19.09.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- **Gayrard, Philippe**
75009 Paris (FR)
- **Ledreau, Agathe**
75010 Paris (FR)

(30) Priority: **20.09.1999 US 154772 P**

(71) Applicant: **Delphi Technologies, Inc.**
Troy, MI 48007 (US)

(74) Representative: **Denton, Michael John et al**
Delphi European Headquarters,
64 avenue de la Plaine de France,
Paris Nord II,
BP 60059,
Tremblay-en-France
95972 Roissy Charles de Gaulle Cédex (FR)

(72) Inventors:
• **Manwaring, Marvin**
Saginaw, MI 48603 (US)

(54) Vehicle steering column

(57) The vehicle steering column (10) has a rake adjustment and a telescope adjustment. The adjustment mechanism includes a compression bracket (28) with a telescope slot (34), a rake bracket (38) with a rake slot (42) and a rake bolt (54) that passes through the telescope slot (34) and the rake slot (42). A wedge lock (68) is mounted on the rake bolt (54) and positioned in the rake slot (42) and the telescope slot (34). Rake and tel-

escope teeth (74) and (72) on the wedge lock (68) are held out of engagement with a rake tooth rack (58) and a telescope tooth rack (64) during rake and telescope adjustment. The rake bolt (54) is tightened to hold a selected adjustment position and the telescope teeth (72) on the wedge lock (68) engage the telescope tooth rack (64). During a collision the rake teeth (74) on the wedge lock (68) are moved into engagement with the rake tooth rack (58) to fix the rake and telescope adjustments.

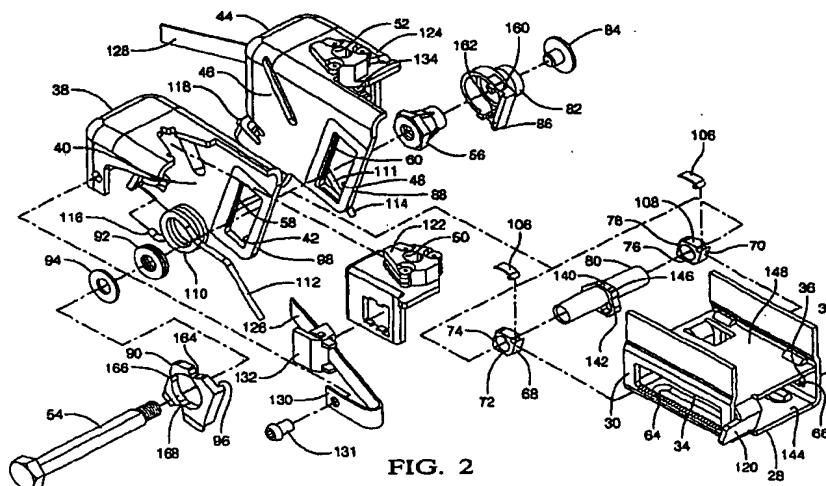


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 3237

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 503 431 A (YAMAMOTO YOSHIMI) 2 April 1996 (1996-04-02) * the whole document *	1-4,7,8, 20-22	B62D1/187 B62D1/19
A	-----	10,17,23	
X	EP 0 782 951 A (NASTECH EUROP LTD) 9 July 1997 (1997-07-09) * column 2, line 42 - column 3, line 8; figures 1,2 *	1,7,8, 20,22	
A	-----	10-19	
	US 5 722 299 A (KURITA HARUhide ET AL) 3 March 1998 (1998-03-03) * column 11, line 20 - column 15, line 23; figures 19-27 *		
A	-----	10-19	
	GB 2 311 839 A (NASTECH EUROP LTD) 8 October 1997 (1997-10-08) * the whole document *		

			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B62D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 7 April 2004	Examiner Blondeau, A
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 3237

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-04-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5503431	A	02-04-1996	JP	3094053 B2	03-10-2000
			JP	7232649 A	05-09-1995
EP 0782951	A	09-07-1997	GB	2308875 A	09-07-1997
			BR	9700003 A	27-10-1998
			DE	69610067 D1	05-10-2000
			DE	69610067 T2	12-04-2001
			EP	0782951 A1	09-07-1997
			JP	9290759 A	11-11-1997
US 5722299	A	03-03-1998	JP	3382355 B2	04-03-2003
			JP	8011725 A	16-01-1996
			JP	3335485 B2	15-10-2002
			JP	8080857 A	26-03-1996
			JP	8099640 A	16-04-1996
GB 2311839	A	08-10-1997	DE	69701033 D1	03-02-2000
			DE	69701033 T2	13-07-2000
			EP	0889820 A1	13-01-1999
			WO	9736775 A1	09-10-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)